

LEDDriving HL INTENSE H4/H19



Up to +350% more brightness

More light allows to see farther and therefore react sooner. Signs, obstacles and hazards can be recognized sooner. Compared to minimum ECE R112



Very compact LED replacement for conventional H4/H19 high and low beam lamps (2in1)

Reduced glaring thanks to an optimized light distribution



Cool White color temperature of 6,000 K

Better visibility thanks to daylight effect



5-year OSRAM guarantee

For precise conditions, please refer to www.osram.com/am-guarantee

OSRAM's highest performing LED off-road retrofit lamp

With up to +350% more brightness (compared to ECE R112) and a very compact LED replacement of conventional H7/H18 and H4/H19 high and low beam lamps, the LEDDriving HL INTENSE is OSRAM's highest performing LED off-road retrofit lamp ever! This LED retrofit lamp offers OSRAM top technology beam pattern as well as an easy installation with a wide OSRAM range of suitable accessories. Top thermal management technology with integrated active cooling – a high speed fan ensures maximized heat dissipation for more powerful

Product datasheet



performances. Also premium OSRAM quality, manufactured in a certified OSRAM production plant in Italy, and a 5-year guarantee as well as a long service life. For precise guarantee conditions please refer to www.osram.com/am-guarantee.

The LED high and low beam lamps by OSRAM replace conventional halogen lamps, are 12V compatible and have a color temperature of 6,000K. With the latest LED technology and very compact design, these lamps allow a high compatibility and an easy installation for an even wider range of car models. These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Product datasheet

Technical data

Product information

| | |
|---|-------------------------------------|
| Product type (off-road vs. on-road) | Off-road \triangle H4/H19 |
| Application (Category and Product specific) | Mainly used for Low Beam, High Beam |

General Product Information

| | |
|------------------------|------------|
| Global order reference | 64193DWINT |
|------------------------|------------|


Electrical Data

| | |
|-----------------------|-------------|
| Power input | 25 / 21.0 W |
| Nominal voltage | 12 V |
| Nominal wattage | 27 W |
| Test voltage | 13.2 V |
| Power input tolerance | ± 15 % |

Photometric Data

| | |
|-------------------------|--------------|
| Nominal luminous flux | 1900/1350 lm |
| Luminous flux tolerance | ± 20 % |
| Color temperature | 6000 K |
| Light color LED | Cool white |

Physical Attributes & Dimensions

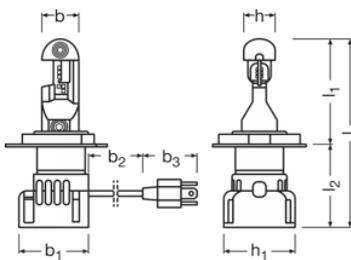

| | |
|----------------|---------|
| Length | 87.4 mm |
| Diameter | 18.5 mm |
| Diameter | 18.5 mm |
| Product weight | 76.00 g |
| Lamp base | - |

Product datasheet

Lifetime Data

| | |
|-------------|---------|
| Lifespan Tc | 5000 hr |
| Guarantee | 5 years |

Capabilities

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Environmental & Regulatory Information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|--|
| Primary article identifier | 4062172306454 |
| Candidate list substance 1 | Lead |
| CAS No. of substance 1 | 7439-92-1 |
| Safe use instruction | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration no. in SCIP database | 00479b3c-8dd8-47ab-8d78-e578b9e2419f |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|------------------------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4062172306454 | LEDiving HL INTENSE \cong H4/H19 | Folding carton box 2 | 136 mm x 56 mm x 162 mm | 1.23 dm ³ | 220.00 g |
| 4062172306461 | LEDiving HL INTENSE \cong H4/H19 | Shipping carton box 8 | 240 mm x 148 mm x 182 mm | 6.46 dm ³ | 1006.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File |
|--|
|  User instruction LEDiving HL INTENSE |
|  User instruction GPRS_Safety symbols instructions |
|  Brochures LEDiving Retrofits - Exchange overview (EN) |

Legal advice

Product datasheet

These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



OSRAM